

April 2011


SMD-Phototransistor

35°

FSR6849 - FSR6851OHK

Features

- * 4.8mm Phototransistor with separate Base for general purpose
- * Daylight filtered black housing optimized for LED's with 855nm - 870nm
- * Mechanical matched with FQS5563AT15, FQS5593BM14
- * SMT-Mountable in row with 5mm distance
- * Medium viewing angle of typ. 35 degree

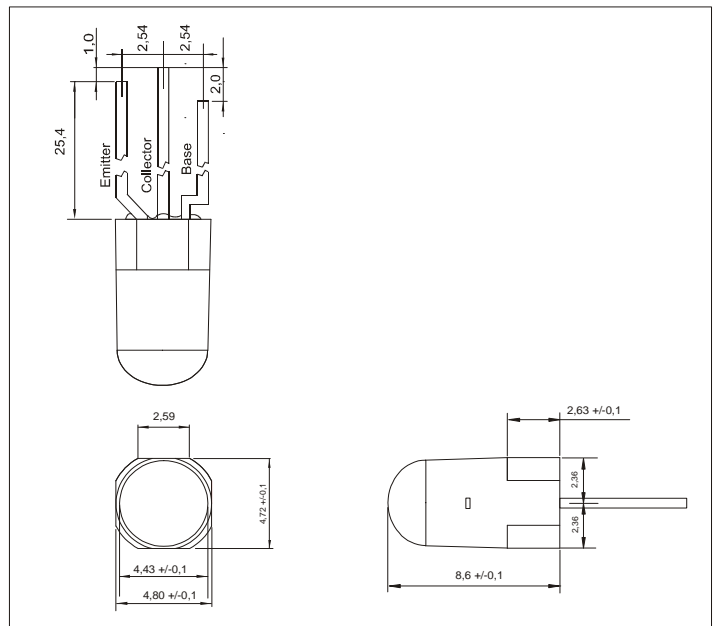

Electrical and optical characteristics and absolute maximum ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	MIN	Typ	MAX	Unit	Test conditions
I _{Light}	Light Current FSR3849	1,7	2,90		mA	V _{ce} =10V; E _e = 0.5mW/cm ² ; @940nm
I _{Light}	Light Current FSR3850	2,1	3,50		mA	V _{ce} =10V; E _e = 0.5mW/cm ² ; @940nm
I _{Light}	Light Current FSR3851	2,4	3,9		mA	V _{ce} =10V; E _e = 0.5mW/cm ² ; @940nm
I _{ceo}	Collector Dark Current			100	nA	V _{ce0} =10V; E _v =0
V _{bceo}	Collector-Emitter Breakdown Voltage	30			V	I _c = 100μA H=0mW/cm ²
V _{beco}	Collector-Emitter Breakdown Voltage	5			V	I _c = 100μA H=0mW/cm ²
V _{sat}	Collector-Emitter Saturation Voltage			0,3	V	I _b = 100μA I _c =2mA
λ _{Peak}	Peak Wavelength	850	860	880	nm	max. sensitivity
λ _{0,5}	Spectral range	700		1100	nm	I=10%
t _f	Fall time		15		μs	V _R =5V; R _L =1KOhm, I _c =1mA
t _r	Rise time		15		μs	V _R =5V; R _L =1KOhm, I _c =1mA
A	Active Array		0,146		mm ²	
β	Current Gain FSR6849	500		1000		V _{ce} =5V; I _c =2mA
β	Current Gain FSR6850	800		1300		V _{ce} =5V; I _c =2mA
β	Current Gain FSR6851	1000		1800		V _{ce} =5V; I _c =2mA
2Φ _{0,5}	Response Angle		35		deg.	Φ _i = 50%
T _{Operating}	Operating Temperature	-25		85	°C	
T _{Storage}	Storage Temperature	-25		100	°C	
T _{Soldering}	Soldering Temperature			260	°C	5mm from case @5 sec.
Θ _{j-PIN}	Thermal Resistance		450		K/W	
P _{tot}	Total Power Dissipation			50	mW	

Order Informations :




FSR6849OHK Bulk (1000pcs. /Bag)
 FSR6850OHK Bulk (1000pcs. /Bag)
 FSR6851OHK Bulk (1000pcs. /Bag)

Fietje reserves the right to make changes at any time in order to improve design and to supply the best product possible, contact Fietje for latest device specification sheets before using.

SMD-Phototransistor

35°

FSR6849 - FSR6851OHK

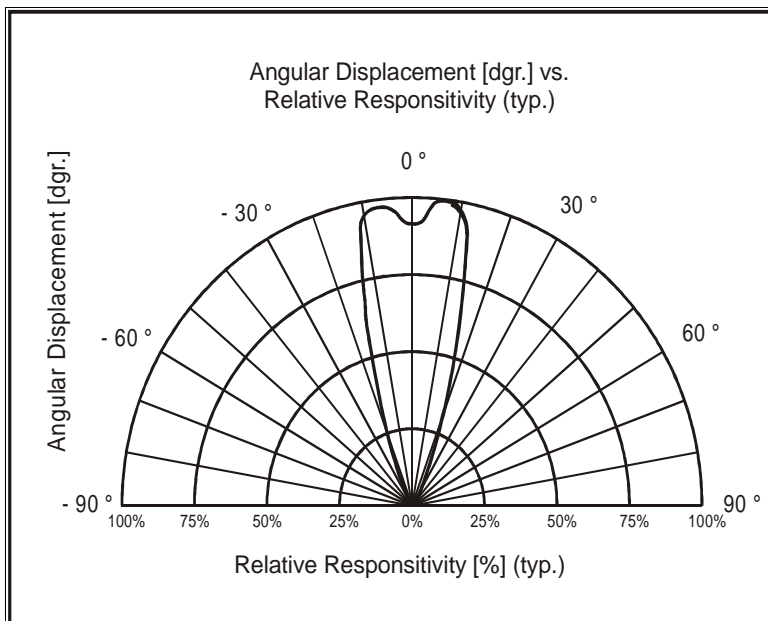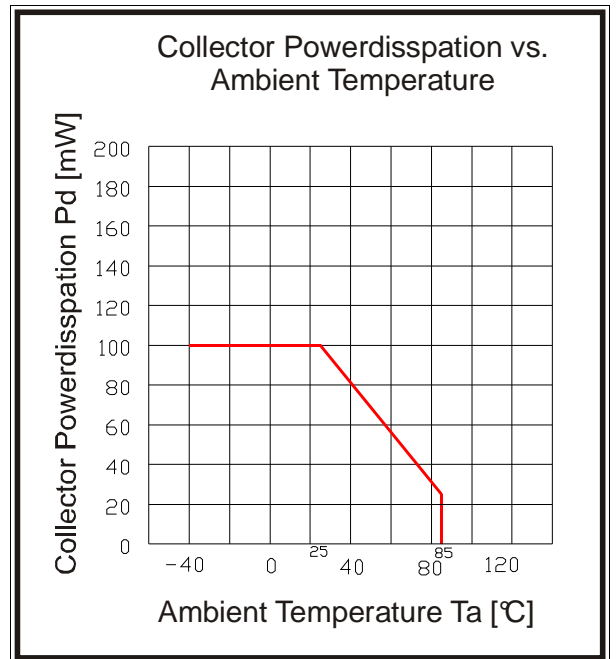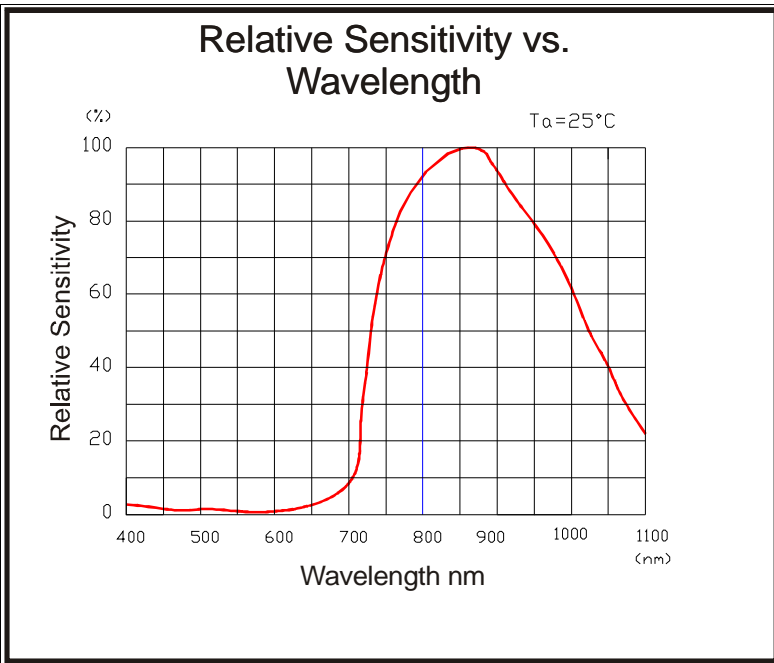

Fietje reserves the right to make changes at any time in order to improve design and to supply the best product possible, contact Fietje for latest device specification sheets before using.