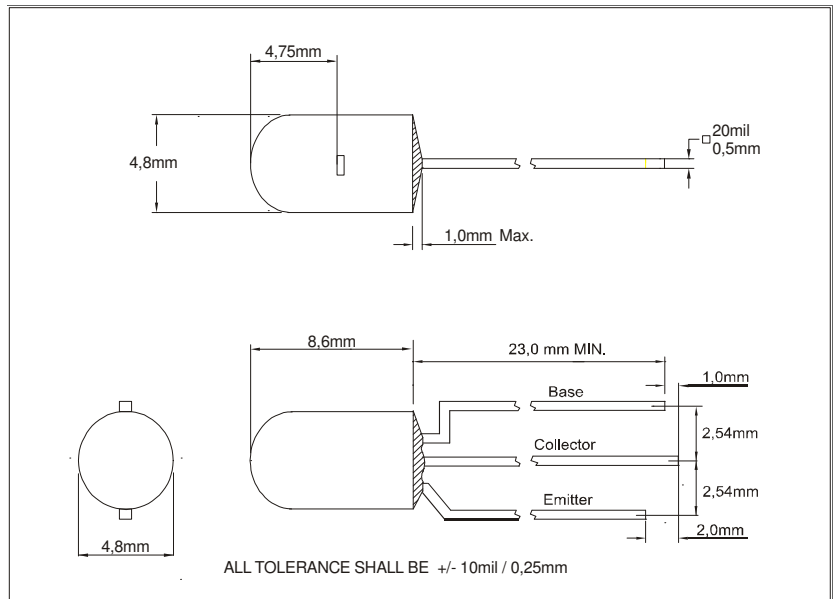


Phototransistor
25°
FSR3843 - FSR3845
Features

- * 4.8mm Phototransistor with separate Base for general purpose
- * Daylight filtered black housing
- * Mechanical matched with FQR5553
- * Mountable in row with 5mm distance
- * Narrow viewing angle of typ. 25 degree


Electrical and optical characteristics and absolute maximum ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	MIN	Typ	MAX	Unit	Test conditions
I _{Light}	Light Current FSR3843	2,3	4		mA	V _{ce} =10V; E _e = 0.5mW/cm ² ; @940nm
I _{Light}	Light Current FSR3844	2,6	4,5		mA	V _{ce} =10V; E _e = 0.5mW/cm ² ; @940nm
I _{Light}	Light Current FSR3845	3,5	5,5		mA	V _{ce} =10V; E _e = 0.5mW/cm ² ; @940nm
I _{ceo}	Collector Dark Current			100	nA	V _{ce} =10V; E _v =0
V _{bceo}	Collector-Emitter Breakdown Voltage	30			V	I _c = 100μA H=0mW/cm ²
V _{beco}	Collector-Emitter Breakdown Voltage	5			V	I _c = 100μA H=0mW/cm ²
V _{sat}	Collector-Emitter Saturation Voltage			0,3	V	I _b = 100μA I _c =2mA
λ _{Peak}	Peak Wavelength		860		nm	max. sensitivity
λ _{0.5}	Spectral range	700		1150	nm	I=10%
t _f	Fall time		15		μs	V _R =5V; R _L =1KOhm, I _c =1mA
t _r	Rise time		15		μs	V _R =5V; R _L =1KOhm, I _c =1mA
A	Active Array		0,146		mm ²	
β	Current Gain FSR3843	500		1000		V _{ce} =5V; I _c =2mA
β	Current Gain FSR3844	800		1300		V _{ce} =5V; I _c =2mA
β	Current Gain FSR3845	1000		1800		V _{ce} =5V; I _c =2mA
2Φ _{0.5}	Response Angle		25		deg.	Φ _i = 50%
C _J	Junction Capacity		6		pF	V _R =0V; f=1 MHz; E _v =0 Lux
T _{Operating}	Operating Temperature	-25		85	°C	
T _{Storage}	Storage Temperature	-25		100	°C	
T _{Soldering}	Soldering Temperature			260	°C	5mm from case @5 sec.
Θ _{j-PIN}	Thermal Resistance		450		K/W	
P _{tot}	Total Power Dissipation			50	mW	

Order Informations :

FSR3843	Bulk
FSR3844	Bulk
FSR3845	Bulk

Fietje reserves the right to make changes at any time in order to improve design and to supply the best product possible, contact Fietje for latest device specification sheets before using.

Phototransistor

25°

FSR3843 - FSR3845

